

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 May 2003 (08.05.2003)


PCT

(10) International Publication Number
WO 03/038174 A1

- (51) International Patent Classification⁷: **D04H 3/16**, 3/04, D01D 5/098
- (21) International Application Number: PCT/US02/24644
- (22) International Filing Date: 2 August 2002 (02.08.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/325,056 26 September 2001 (26.09.2001) US
- (71) Applicant (for all designated States except US): **BBA NONWOVENS SIMPSONVILLE, INC.** [US/US]; 844 S.E. Main Street, Simpsonville, SC 29681 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **TAYLOR, Thomas, B.** [US/US]; 11 Briar Park Drive, Greer, SC 29651 (US).
- (74) Agents: **LINKER, Raymond, O., Jr.** et al.; Alston & Bird LLP, Bank of America Plaza, 101 South Tryon Street, Suite 4000, Charlotte, NC 28280-4000 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU (petty patent), AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR PRODUCING A NONWOVEN WEB OF FILAMENTS

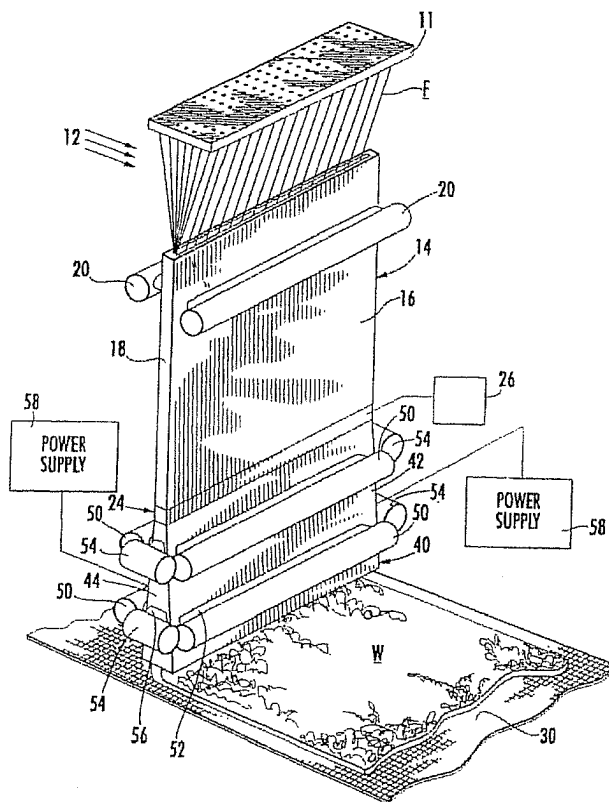

(57) Abstract: Spunbond nonwoven fabrics are produced with an apparatus which comprises a spinnerette having a plurality of orifices for extruding filaments; an attenuator for receiving and attenuating the filaments and a collection surface upon which the filaments are deposited to form a nonwoven web. A filament diffuser is positioned between the attenuator and the collection surface in the path of filament travel. The diffuser comprises a pair of opposing divergingly arranged side walls and a pair of opposing end walls, these walls collectively defining filament passageway. In accordance with one embodiment of the invention, a flow of fluid is injected along the walls of the diffuser in the direction of filament travel. More particularly, fluid is injected along both the opposing divergingly arranged walls and the opposing ends walls which form the diffuser. In another aspect of the present invention, the filaments are electrostatically charged and a like electrical charge is imparted to the walls of the diffuser. By independently controlling the electrical potential applied to the respective walls of the diffuser, the path of travel of the filaments through the diffuser can be affected in ways which improve the filament distribution and web formation.

WO 03/038174 A1



ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

Published:

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

APPARATUS AND METHOD FOR PRODUCING A NONWOVEN WEB OF FILAMENTS

FIELD OF THE INVENTION

This invention relates to the manufacture of nonwoven fabrics, and more particularly to improvements in the manufacture of a spunbonded nonwoven web formed of substantially continuous filaments.

5

BACKGROUND OF THE INVENTION

In the manufacture of nonwoven webs by the well-known "spunbond" process, continuous filaments of a molten polymer are extruded from a large number of orifices formed in a spinnerette plate, the filaments are stretched or
10 drawn, and are then randomly deposited upon a collection surface to form a nonwoven web. The stretching or attenuation can be mechanically through the use of draw rolls, or, as is more widely practiced, pneumatically by passing the filaments through a pneumatic attenuator.

Manufacturers of spunbonded nonwoven fabrics have long sought to
15 improve the manufacturing process to achieve higher productivity and better quality and uniformity of the spunbonded nonwoven fabric. Maintaining the quality and uniformity of the fabric becomes a particular concern at higher production speeds and when producing fabrics of low basis weight. Several characteristics affect the quality and uniformity of spunbonded nonwoven fabrics.

20 Filament separation is the degree of separation of the individual filaments from one another. Good filament separation occurs when the filaments are randomly arranged with limited parallel contact between the filaments. Ideally, no individual filaments should be in parallel contact with another filament, although, in practice, filaments tend to be in parallel contact over considerable distances.

Good filament separation is particularly important for lightweight fabrics, where good coverage is more difficult to achieve. Ropiness is the extreme state of poor filament separation. Large numbers of filaments in parallel twisted contact result in long strands in the fabric, which can causes holes or very thin areas in the fabric.

- 5 Splotchiness is a relative large-scale non-uniformity in basis weight. A fabric having splotchiness is generally weak because of the lower tensile strength of the thin areas of the fabric. Also, a splotchy fabric generally has poor cover properties.

Many attempts have been made to address the problems of poor filament separation, ropiness and splotchiness while still preserving the tensile properties of nonwoven webs made from spunbond thermoplastic filaments. For example, U.S. Pat. Nos. 3,296,678; 3,485,428 and 4,163,305 describe various apparatus and methods for mechanical and pneumatic oscillation of continuous filament bundles to spread the filaments as they are deposited on the collection surface. U.S. Pat. No. 4,334,340 describes using an airfoil at the exit of a round attenuator tube to
10 separate continuous filaments prior to their deposit on a forming wire. Forced air follows the leading edge of the air foil and filaments striking the foil are carried by the forced air onto a forming wire, resulting in a spreading of the filament bundle that promotes random deposit of the filaments.
15

Various electrostatic methods have been proposed to promote spreading of the filament bundle by applying an electric charge to the filaments to cause the filaments to repel one another. U.S. Pat. Nos. 3,338,992 and 3,296,678 describe electrostatically charging the filament bundle with an ion gun or corona discharge device prior to drawing and forwarding the filaments. U.S. Patent 5,397,413 describes a process for producing spunbond nonwoven fabrics wherein the
20 filaments are attenuated with a slot shaped pneumatic attenuator and wherein the filaments are electrostatically charged to enhance filaments separation.
25

A number of spunbond manufacturing processes employ a diffusion chamber located between the pneumatic attenuator and the collection surface to assist in controlling the airflow and thereby achieving improved formation. For example, devices of this general type are shown in the apparatuses described in
30 U.S. Patents 3,334,161; 4,812,112; 5,211,903; 5,439,364; 5,814,349, and in published applications WO 00/65133 and WO 00/65134.

While the known apparatus and processes are satisfactory in many respects, it is still recognized that the formation of a spunbond fabric is not as uniform and consistent as is desirable, and that the need exists to continue to improve the uniformity of a spunbond nonwoven fabric.

5 Accordingly, it is an object of the present invention to provide improvements in the manufacture of spunbond nonwoven fabrics, and in particular to provide for improved formation of the filaments into a spunbond nonwoven fabric with enhanced uniformity.

10

SUMMARY OF THE INVENTION

In accordance with the present invention, it has been discovered that the aerodynamic behavior of the airflow in a region just above where the filaments are deposited on the collection surface chamber plays an important role on the uniformity of formation of the fabric. In accordance with the invention, a filament
15 diffuser is positioned between the attenuator and the collection surface in the path of filament travel. The diffuser comprises a pair of opposing divergently arranged side walls and a pair of opposing end walls, these walls collectively defining filament passageway. In accordance with one embodiment of the invention, it has been found that the formation can be significantly improved by injecting a flow of
20 fluid along the walls of the diffuser in the direction of filament travel. More particularly, fluid is injected along both the opposing divergently arranged walls and the opposing end walls which form the diffuser.

In another aspect of the present invention, it has been found that the formation can be further improved by electrostatically guiding the filaments. This
25 is achieved by electrostatically charging the filaments and also imparting a like electrical charge to the walls of the diffuser. By independently controlling the electrical potential applied to the respective walls of the diffuser, the path of travel of the filaments through the diffuser can be affected in ways which improve the filament distribution and web formation.

30 Thus, in accordance with one aspect of the present invention, an apparatus for producing nonwoven fabrics is provided which includes a spinnerette having a plurality of orifices for extruding filaments, an attenuator for receiving and

attenuating the filaments, and a collection surface upon which the filaments are deposited to form a nonwoven web. A filament diffuser is positioned between the attenuator and the collection surface in the path of filament travel. The diffuser comprises a pair of opposing divergently arranged side walls and a pair of
5 opposing end walls, these walls collectively defining filament passageway. At least one fluid injection port is provided in the side walls oriented for injecting a flow of fluid along the side walls in the direction of filament travel. At least one fluid injection port is also provided in the end walls oriented for injecting a flow of fluid along the end walls in the direction of filament travel.

10 According to another aspect of the invention, an apparatus for producing nonwoven fabrics is provided which includes a spinnerette having a plurality of orifices for extruding filaments, an attenuator for receiving and attenuating the filaments; and a collection surface upon which the filaments are deposited to form a nonwoven web. A filament diffuser is positioned between the attenuator and the
15 collection surface in the path of filament travel. The diffuser comprises a pair of opposing divergently arranged side walls and a pair of opposing end walls defining a filament passageway. A corona device is provided cooperating with the filaments for imparting an electrical charge on the filaments, and means is provided for imparting a like electrical charge on at least one of the side walls of
20 said filament diffuser so as to thereby guide the filaments as they pass through the diffuser. Preferably, the electrical charge is imparted on at least one of the side walls of filament diffuser by a first power supply electrically connected to one of said the walls and a second power supply electrically connected to the other of said the walls. The first and second power supplies are independently controllable for
25 applying a variable electrical potential to the respective side walls for thereby electrostatically guiding the filaments as they pass through the filament diffuser.

BRIEF DESCRIPTION OF THE DRAWINGS

Some of the features and advantages of the present invention having been
30 stated, others will appear as the description proceeds, when taken in connection with the accompanying drawings, in which

Figure 1 is a schematic front prospective view showing an apparatus for producing a spunbond nonwoven fabric in accordance with the invention;

Figure 2 is a schematic side cross sectional view of the apparatus;

Figure 3 is a side cross sectional view similar to Figure 2 showing an
5 alternative embodiment of the apparatus; and

Figure 4 is an end view of the apparatus, with portions broken away.

DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

The present invention now will be described more fully hereinafter with
10 reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the
15 art. Like numbers refer to like elements throughout.

Figure 1 schematically illustrates a portion of an apparatus for producing a spunbond nonwoven web of continuous filaments. Continuous filament F of a thermoplastic polymer are produced by extruding molten thermoplastic polymer through orifices in a spinnerette plate 11 which forms part of a spin block
20 assembly. The molten thermoplastic polymer is supplied to the spin block assembly from an extruder. Suitable equipment for this purpose is commercially available from various sources. The spunbond process is applicable to a variety of thermoplastic polymers, copolymers and mixtures thereof, and it will be understood that the present invention is not restricted to any specific polymer
25 compositions. As the molten polymer is extruded from the spinnerette 11 to form filaments, cooling air 12 is directed into contact with the filaments to quench and solidify the molten polymer. The filaments enter the open upper end of a slot draw attenuator 14. The slot draw attenuator 14 is defined by a pair of opposing side walls 16. In the embodiment shown, opposite ends of the attenuator are closed by
30 end walls 18. Pressurized air supplied by a fan or blower, not shown, is directed into manifolds 20 which extend alongside the outer surfaces of the side walls 16 across substantially the full widthwise extent of the wall. Air from the manifold is

directed via a duct and is injected into the attenuator in the direction of filament travel through openings provided in the attenuator walls 16. The downward flow of air through the attenuator 14 causes acceleration of the filaments and results in attenuation or drawing of the filaments. In the embodiment shown, the
5 acceleration and attenuation of the filaments results from the injection of air into the attenuator. However, those skilled in the art recognize that the present invention is not limited to the particular type of attenuation shown in the drawings and that other well-known types of mechanical or pneumatic attenuators could be utilized.

10 A corona device, generally indicated by reference character 24, is located adjacent the exit end of the attenuator. The corona device generates a corona of ionized air through the filaments F pass, which introduces an electrostatic charge on the filaments, causing the filaments to repel one another. The attenuator device is connected to a high voltage power supply 26. The corona device more
15 particularly includes a corona electrode assembly 27 that is carried by one attenuator side wall and extends the full width of the wall in the cross machine direction. The electrode assembly is connected to the high voltage power source 26. Located opposite the electrode assembly and carried by the opposite attenuator wall is a ground plate 28 which is electrically grounded. The corona device is
20 described in greater detail in U.S. Patent 5,397,413, which is incorporated herein by reference.

After the filaments emerge from the discharge end of the attenuator 14, they continue to travel downwardly and are randomly deposited on a collection surface to form a nonwoven web W. More particularly, in the embodiment shown
25 the collection surface is an endless moving open mesh belt 30, shown more clearly in Figure 2.

Located between the lower end of the attenuator 16 and the upper surface of the belt is a diffuser chamber generally indicated at 40. The diffuser 40 is defined by a pair of opposing side walls 42 and end walls 44. The side walls have
30 a width dimension corresponding substantially to the width of the belt and thus extend generally in the cross machine direction across the belt. The walls 42 are arranged at an angle to one another diverging in the direction of filament travel.

Thus, the side walls **42** and end walls **44** define a filament passageway with a relatively narrow slot shaped open upper end positioned for receiving the filaments from the attenuator and with an open lower end of larger cross sectional area positioned just above the collection belt **30**. The increasing cross sectional area of the diffuser chamber in the direction of filament travel allows for deceleration of the air in the diffuser chamber.

In accordance with the present invention, it has been determined that the aerodynamic conditions within the diffuser chamber play an important role in achieving good web formation. Moreover, periodic eddy currents or other transient variations in aerodynamic conditions cause transient variations in the arrangement or distribution of the filaments as they approach the collection belt. Once the filaments are laid down on the collection belt, this transient variation in filament distribution is "frozen" into the web and will be evident as variations in the web formation, such as blotches or thick or thin areas in the web. Therefore, to eliminate such transient disturbances, a fluid, preferably air, is injected into the diffuser chamber along the walls of the diffuser chamber in the direction of filament travel. The injection of air along the walls alters the air velocity profile within the diffuser chamber, and in so doing, eliminates or reduces transient variations in aerodynamic conditions. As seen in Figure 2, air is injected into the diffuser through elongate slits formed in each side wall **42**. Pressurized air is supplied to the slit. The slit is formed so as to introduce the air into the diffuser chamber downwardly in the direction of filament travel and generally parallel to the inner surfaces of the side walls **42**.

In the embodiment shown in Figure 2, air is injected into the diffuser **40** at more than one location along the height dimension of the side wall **42**. Each side wall includes an upper elongate slit **46** located adjacent the upper end of the side wall **42** and a lower slit **48** downstream in the direction of filament travel from the upper slit. Each slit extends substantially entirely across the widthwise extent of the side wall **42**. A manifold **50** is located adjacent the outer surface of the side wall **42** alongside each slit and a supply duct **52** connects each manifold **50** to its respective slit **46**, **48**. Each manifold **50** is supplied with pressurized air from a blower, not shown, or other suitable source. The flow of air to each manifold **50**

can be independently controlled by suitable valves, not shown, so that the aerodynamic conditions within the diffuser chamber can be precisely controlled.

Air is also injected into the diffuser 40 along each end wall 44. Each end wall has upper and lower slits therein at locations along the height dimension of the end wall generally corresponding to the locations of the slits 46, 48 in the side walls 42. A manifold 54 and associated supply duct 56 provides a flow of pressurized air through each slit in the end wall 44. Like the slits 46, 48 in the end walls, the slits are oriented so as to introduce air along the interior surface of the end wall downwardly in the direction of filament travel. In addition to eliminating or minimizing transient variations in aerodynamic conditions, the introduction of air along the end walls 44 also provides effective control over the width of the formed web. If the introduction of air along the end walls 44 is eliminated or significantly reduced, the filaments tend to stay away from the end walls 44 and thus fill less than the entire width of the attenuator slot. As a result, a web of reduced width is formed. In addition, the filaments are more concentrated in the central portion of the web and the web density or weight along opposite edges may be lower than in the central portion. By injecting a controlled flow of air along the end walls 44, the filaments can be caused to more uniformly fill the full width of the attenuator slot and formation along the opposite edges of the web is improved. The injection of air along the end walls is controlled independently of the air injected along the side walls for precise control of formation along the full width of the web W.

To obtain further control over the filament distribution within the diffuser 40, an electrostatic charge is applied to the diffuser side walls 42. More specifically, each wall is electrically connected to a respective power supply 58 which supplies a high voltage electrical potential to the respective side walls 42. Each power supply can be independently controlled. The polarity of the electrical potential matches the polarity of the charge on the filaments imparted by the corona electrode assembly 27. Since like electrical charges repel, the electrostatic potential on the side walls 42 causes the filaments to be repelled from the side walls. By independently controlling the electrical potential on each wall, the filaments can be repelled more from one side wall 42 than from the opposite wall.

The filaments can thus be electrostatically guided or “steered” within the diffuser chamber **40** in a manner analogous to the way that a beam of electrons in a television picture tube is deflected by a deflection coil associated with the picture tube.

5 Figure 4 is an end view of the apparatus schematically illustrating the path of travel of the filaments from the spinnerette plate **12** to the collection belt **30**. Portions of the wall of the attenuator have been broken away for clarity of illustration.

 Figure 3 illustrates an alternate embodiment of an apparatus in accordance
10 with the present invention. Since most of the elements in this embodiment are substantially identical to those previously described in connection with Figures 1 and 2, these like elements are identified by the same reference characters to avoid repetitive description. Basically, the embodiment of Figure 3 differs over that of Figure 1 in that the corona device for electrostatically charging the filaments is
15 located between the spinnerette plate **12** and the top of the attenuator **14**, rather than between the bottom of the attenuator **14** and the diffuser **40** as in the previous embodiment. In this embodiment, the filaments travel past at least one corona device **24'** including a corona electrode assembly **27'** and a roll **28'**.

 Many modifications and other embodiments of the invention will come to
20 mind to one skilled in the art to which this invention pertains having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is to be understood that the invention is not to be limited to the specific embodiments disclosed and that modifications and other embodiments are intended to be included within the scope of the appended claims. Although specific
25 terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

THAT WHICH IS CLAIMED:

1. An apparatus for producing nonwoven fabrics comprising:
a spinnerette having a plurality of orifices for extruding filaments;
an attenuator for receiving and attenuating the filaments;
5 a collection surface upon which the filaments are deposited to form a
nonwoven web; and
a filament diffuser positioned between the attenuator and the collection
surface in the path of filament travel, said diffuser comprising a pair of opposing
divergingly arranged side walls and a pair of opposing end walls defining a
10 filament passageway, at least one fluid injection port in said side walls oriented for
injecting a flow of fluid along the side walls in the direction of filament travel, and
at least one fluid injection port in said end walls oriented for injecting a flow of
fluid along the end walls in the direction of filament travel.
2. An apparatus according to claim 1, wherein each of said side walls
15 has an elongate slit defining said at least one fluid injection port, and an air
manifold in fluid communication with said elongate slit, and including means for
supplying air under pressure to said manifold.
3. An apparatus according to claim 2, wherein each of said end walls
20 has an elongate slit defining said at least one fluid injection port, and an air
manifold in fluid communication with said elongate slit, and including means for
supplying air under pressure to said manifold.
4. An apparatus according to claim 1, wherein said collection surface
comprises an endless belt having a width dimension and a length dimension, and
wherein each of said side walls has a width dimension extending widthwise of said
25 endless belt and a height dimension extending over substantially the entire distance
between said attenuator and said collection surface, and wherein each of said side
walls has an elongate slit extending along the width dimension of said wall and
defining said at least one fluid injection port.
5. An apparatus according to claim 4, wherein each of said side walls

includes a first elongate slit extending along the width dimension of said wall at a first location on said side wall and a second elongate slit extending along the width dimension of said wall at a second location downstream in the direction of filament travel from said first location.

5 6. An apparatus according to claim 5, wherein each of said end walls includes a first elongate slit extending along the width dimension of said wall at a first location on said end wall and a second elongate slit extending along the width dimension of said wall at a second location downstream in the direction of filament travel from said first location.

10 7. An apparatus according to claim 1 including means for imparting an electrical charge on the filaments that pass through the filament diffuser, and means for imparting an electrical charge on at least one of said side walls.

 8. An apparatus according to claim 7, wherein said means for
15 imparting an electrical charge on at least one of said side walls is operable for imparting the same polarity electrical charge as is imparted to the filaments so that the electrically charged filaments are electrostatically repelled from said at least one side wall.

 9. An apparatus according to claim 7 wherein said means for
20 imparting an electrical charge on the filaments is located between said attenuator and said filament diffuser.

 10. An apparatus according to claim 7 wherein said means for
imparting an electrical charge on the filaments is located between said attenuator and said spinnerette.

 11. An apparatus according to claim 7, wherein said means for
25 imparting a like electrical charge on at least one of said side walls of said filament diffuser comprises a first power supply electrically connected to one of said side walls and a second power supply electrically connected to the other of said side walls, said first and second power supplies being independently controllable for applying a variable electrical potential to the respective side walls for thereby

electrostatically guiding the filaments as they pass through the filament diffuser.

12. An apparatus for producing nonwoven fabrics comprising:
a spinnerette having a plurality of orifices for extruding filaments;
an attenuator for receiving and attenuating the filaments;
5 a collection surface upon which the filaments are deposited to form a nonwoven web;
a filament diffuser positioned between the attenuator and the collection surface in the path of filament travel, said diffuser comprising a pair of opposing divergingly arranged side walls and a pair of opposing end walls defining a
10 filament passageway;
a corona device cooperating with the filaments for imparting an electrical charge on the filaments, and
means for imparting a like electrical charge on at least one of said side walls of said filament diffuser so as to thereby guide the filaments as they pass
15 through the diffuser.
13. An apparatus according to claim 12 wherein said corona device is located between said attenuator and said filament diffuser.
14. An apparatus according to claim 12 wherein said corona device is located between said spinnerette and said attenuator.
- 20 15. An apparatus according to claim 12, wherein said means for imparting a like electrical charge on at least one of said side walls of said filament diffuser comprises a first power supply electrically connected to one of said side walls and a second power supply electrically connected to the other of said side walls, said first and second power supplies being independently controllable for
25 applying a variable electrical potential to the respective side walls for thereby electrostatically guiding the filaments as they pass through the filament diffuser.
16. An apparatus for producing nonwoven fabrics comprising:
a spinnerette having a plurality of orifices for extruding filaments;
an slot-shaped pneumatic attenuator positioned beneath said spinnerette for

receiving the filaments therefrom;

an endless collection belt beneath said attenuator upon which the filaments are deposited to form a nonwoven web;

5 a filament diffuser positioned between the attenuator and the collection surface in the path of filament travel, said diffuser comprising a pair of opposing divergingly arranged side walls each having a width dimension and a height dimension and a pair of opposing generally parallel solid end walls, each having a width dimension substantially less than that of said side walls and a height dimension substantially the same as that of said side walls, said side walls and end
10 walls defining a filament passageway with a relatively narrow cross sectional area slot shaped open upper end positioned for receiving the filaments from said slot shaped attenuator and with a larger cross sectional area open lower end positioned above said collection belt for depositing the filaments thereon;

an elongate slit formed in each of said side walls and in each of said end
15 walls extending in the width dimension of the respective walls and oriented for injecting a flow of fluid along the walls in the direction of filament travel; and means for supplying fluid under pressure to said slits.

17. An apparatus according to claim 16, including a second elongate slit formed in each of said side walls and in each of said end walls at a location
20 beneath said first-mentioned slit, said second slit extending in the width dimension of the respective walls and being oriented for injecting a flow of fluid along the walls in the direction of filament travel.

18. An apparatus according to claim 16, wherein said means for supplying fluid to said slits includes a respective manifold communicatively
25 connected to each slit, and an independently controlled source of air connected to each said manifold.

19. An apparatus for producing nonwoven fabrics comprising:
a spinnerette having a plurality of orifices for extruding filaments;
an slot-shaped pneumatic attenuator positioned beneath said spinnerette for
30 receiving the filaments therefrom;

an endless collection belt beneath said attenuator upon which the filaments are deposited to form a nonwoven web;

5 a filament diffuser positioned between the attenuator and the collection surface in the path of filament travel, said diffuser comprising a pair of opposing divergingly arranged side walls each having a width dimension and a height dimension and a pair of opposing generally parallel solid end walls, each having a width dimension substantially less than that of said side walls and a height dimension substantially the same as that of said side walls, said side walls and end walls defining a filament passageway with a relatively narrow cross sectional area
10 slot shaped open upper end positioned for receiving the filaments from said slot shaped attenuator and with a larger cross sectional area open lower end positioned above said collection belt for depositing the filaments thereon;

a corona device cooperating with the filaments for imparting an electrical charge on the filaments;

15 a first power supply electrically connected to one of said side walls and a second power supply electrically connected to the other of said side walls, said first and second power supplies being independently controllable for applying a variable electrical potential to the respective side walls for thereby electrostatically guiding the filaments as they pass through the filament diffuser.

20

20. An apparatus according to claim 19, including an elongate slit formed in each of said side walls and in each of said end walls extending in the width dimension of the respective walls and oriented for injecting a flow of fluid along the walls in the direction of filament travel.

25

21. An apparatus according to claim 20, including a second elongate slit formed in each of said side walls and in each of said end walls at a location beneath said first-mentioned slit, said second slit extending in the width dimension of the respective walls and being oriented for injecting a flow of fluid along the
30 walls in the direction of filament travel.

22. An apparatus according to claim 21, wherein said means for supplying fluid to said slits includes a respective manifold communicatively

connected to each slit, and an independently controlled source of air connected to each said manifold.

23. A method for producing nonwoven fabrics comprising:
extruding a plurality of filaments;
5 attenuating the filaments;
directing the filaments through a filament diffuser comprising a pair of
opposing divergently arranged side walls and a pair of opposing end walls defining
a filament passageway, injecting a flow of fluid along the side walls in the
direction of filament travel and injecting a flow of fluid along said end walls in the
10 direction of filament travel;
discharging the filaments from the filament attenuator and depositing the
filaments on a collection surface to form a nonwoven web.
24. A method according to claim 23 including imparting an electrical
charge on the filaments that pass through the filament diffuser, and imparting a like
15 electrical charge on at least one of said side walls.
25. A method according to claim 24 wherein the electrical charge is
imparted on the filaments at a location between said attenuator and said filament
diffuser.
26. A method according to claim 24 wherein the electrical charge is
20 imparted on the filaments at a location above said attenuator.
27. A method according to claim 24, which includes applying a variable
electrical potential to each of said side walls, and independently controlling the
electrical potential applied to each of said side walls for thereby electrostatically
guiding the filaments as they pass through the filament diffuser.
28. A method for producing nonwoven fabrics comprising:
25 extruding a plurality of filaments;
attenuating the filaments;
directing the filaments through a filament diffuser comprising a pair of
opposing divergently arranged side walls and a pair of opposing end walls defining

a filament passageway, injecting a flow of fluid along the side walls in the direction of filament travel and injecting a flow of fluid along said end walls in the direction of filament travel;

5 discharging the filaments from the filament attenuator and depositing the filaments on a collection surface to form a nonwoven web.

 imparting an electrical charge on the filaments, and

 imparting a like electrical charge on at least one of said side walls of said filament diffuser so as to thereby guide the filaments as they pass through the diffuser.

10 29. A method according to claim 28 wherein the electrical charge is imparted on the filaments at a location between said attenuator and said filament diffuser.


 30. A method according to claim 28 wherein the electrical charge is imparted on the filaments at a location above said attenuator.

15 31. A method according to claim 28, which includes applying a variable electrical potential to each of said side walls, and independently controlling the electrical potential applied to each of said side walls for thereby electrostatically guiding the filaments as they pass through the filament diffuser.


 32. A method according to claim 28, wherein the step of injecting a
20 flow of fluid along the side walls comprises directing air into the diffuser and along each of the opposing the side walls thereof through an elongate slit formed in each respective side wall.

 33. A method according to claim 32, wherein the step of injecting a
25 flow of fluid along the end walls comprises directing air into the diffuser and along each of the opposing the end walls thereof through an elongate slit formed in each respective end wall.


1/4

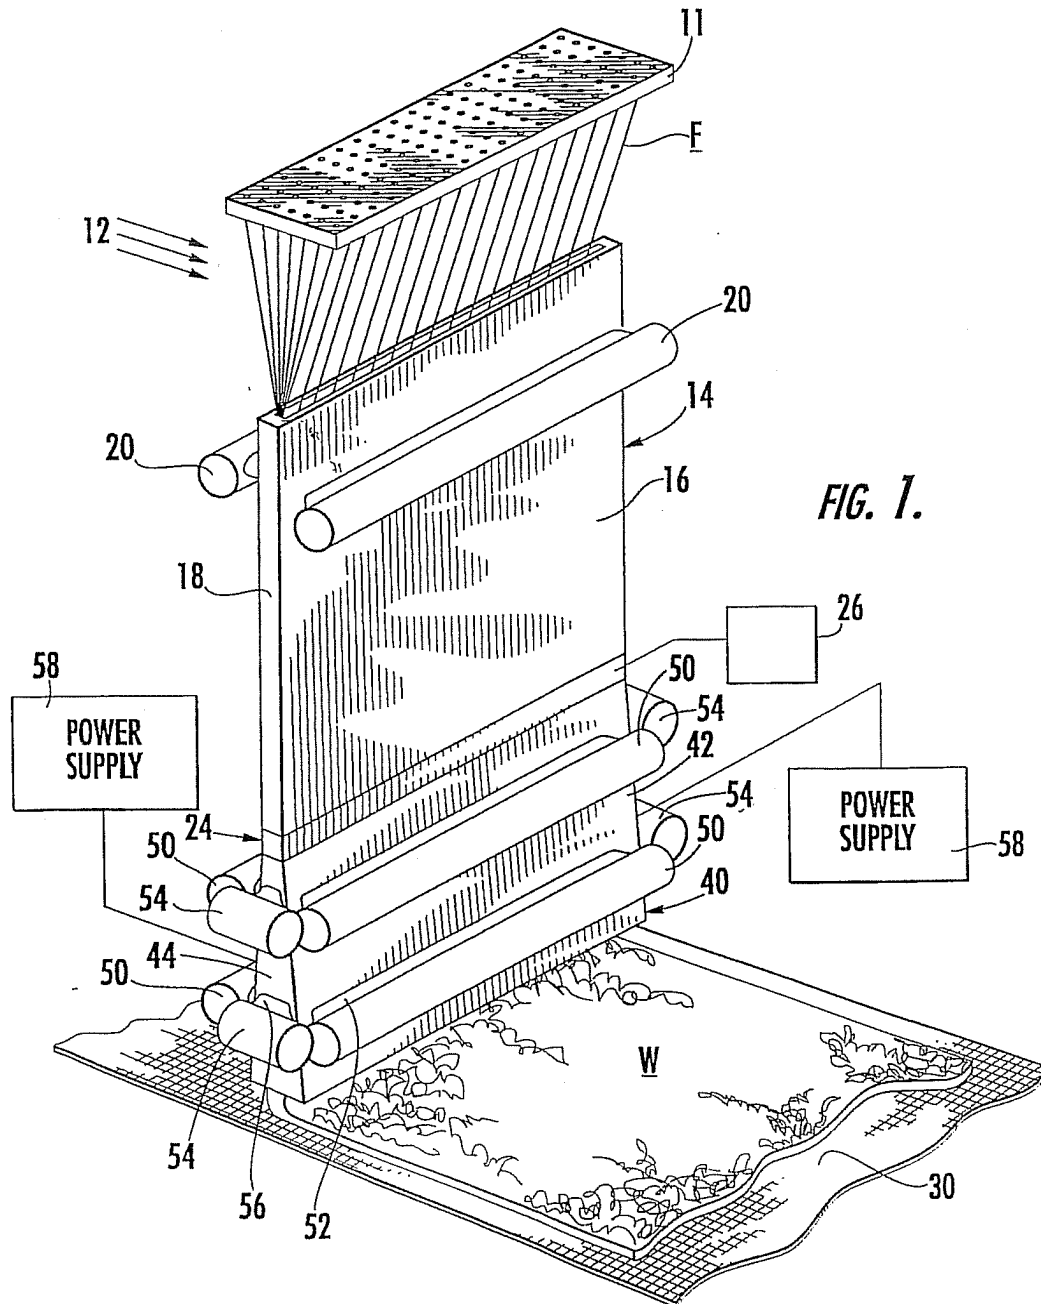

2/4

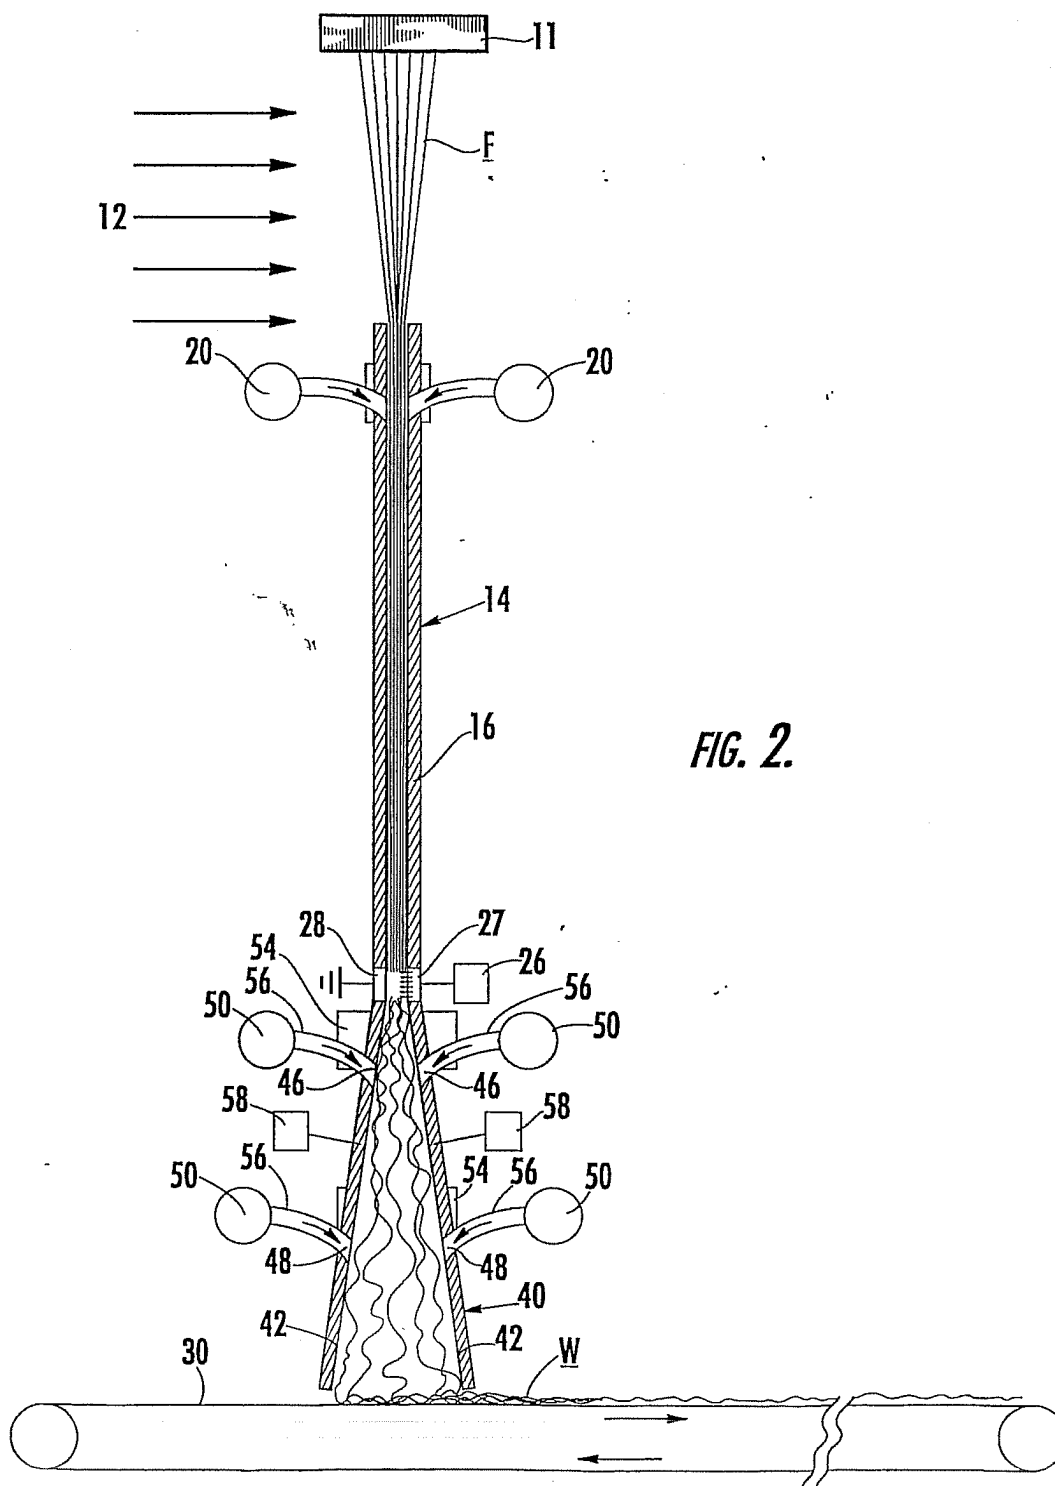

3/4

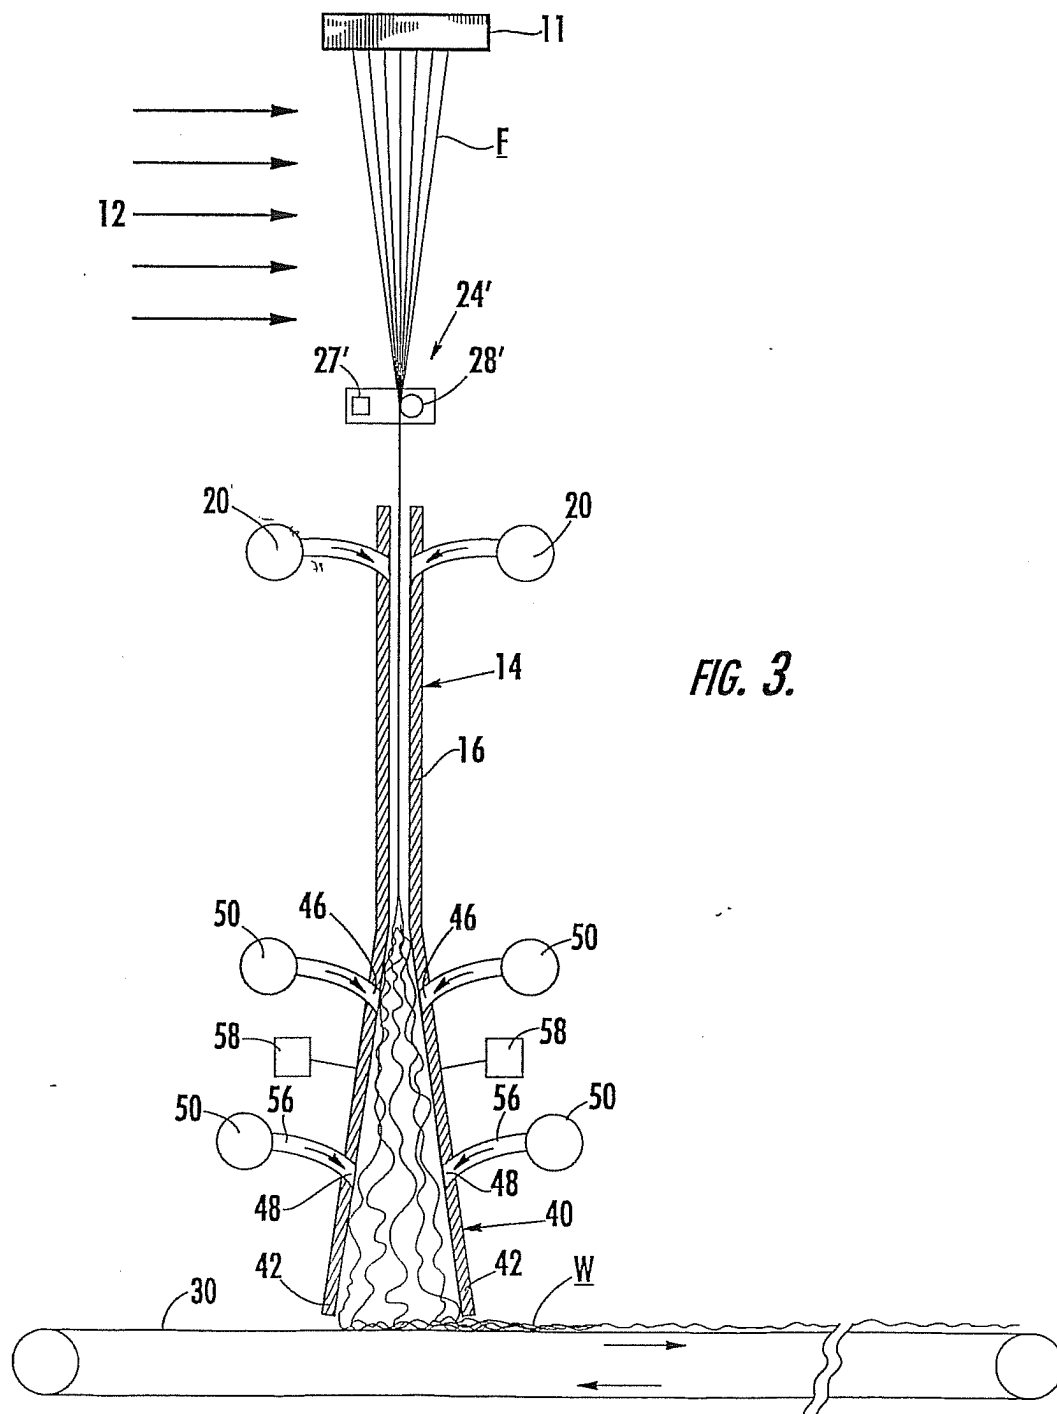

4/4

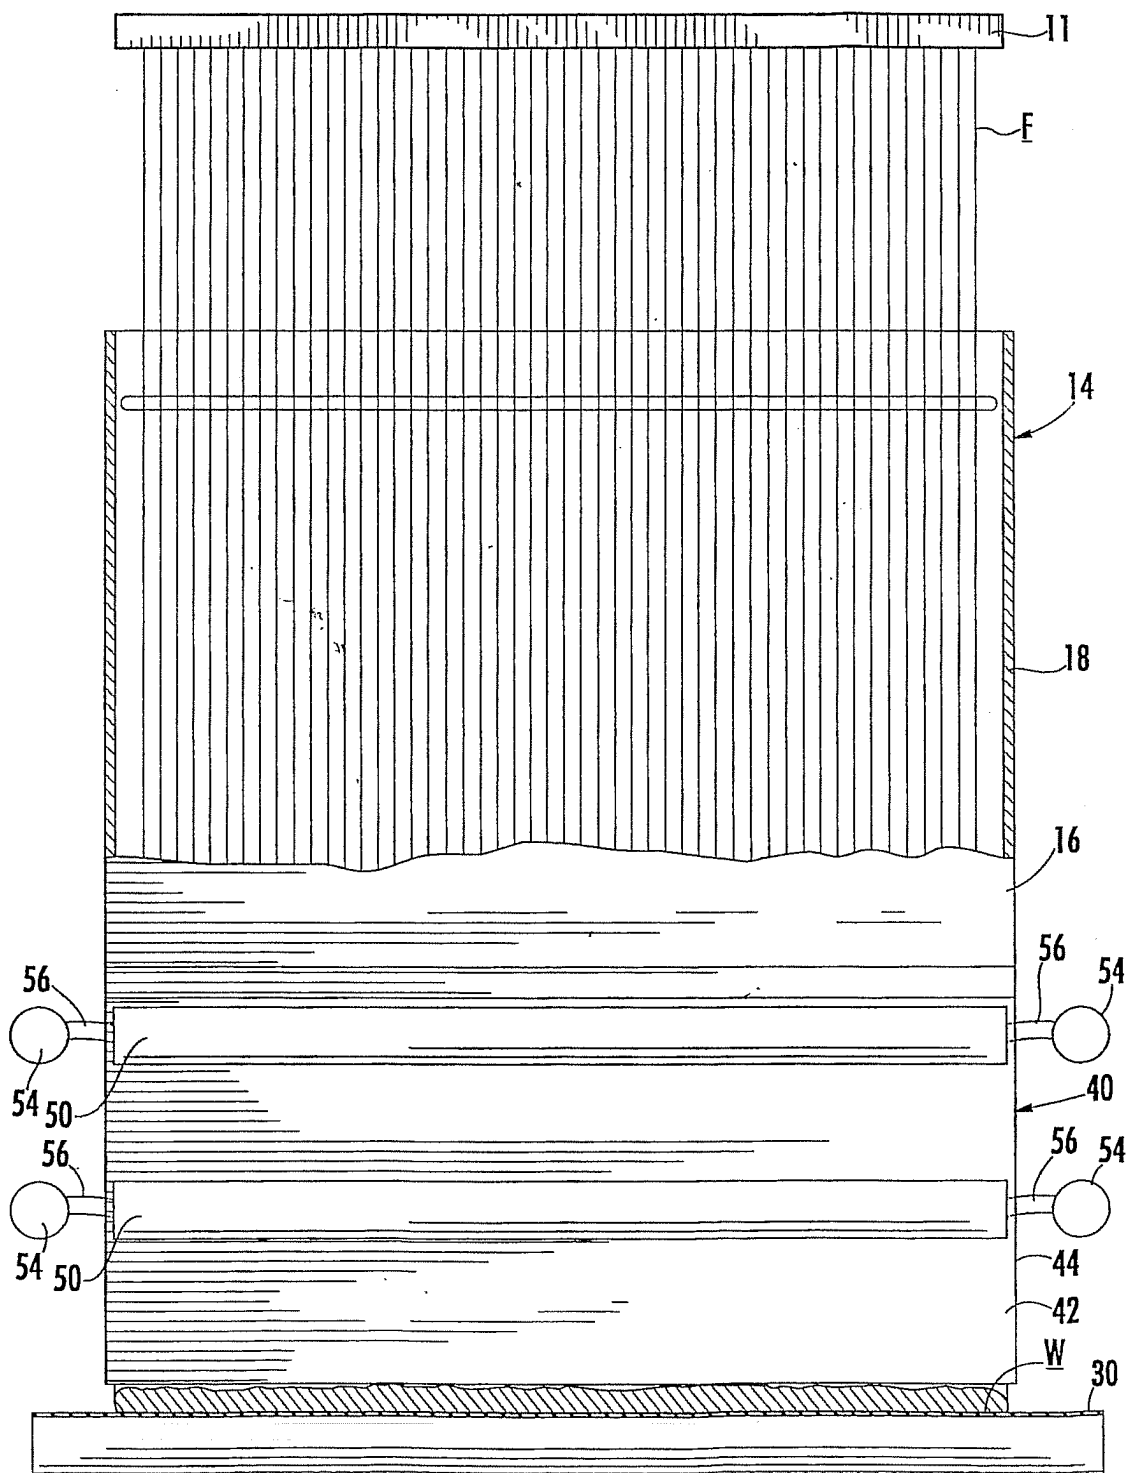


FIG. 4.

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 D04H3/16 D04H3/04 D01D5/098

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D04H D01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	FR 2 815 647 A (RIETER PERFOJET) 26 April 2002 (2002-04-26) figures 1-3	1-33
A	US 3 325 906 A (FRANKE RALPH A) 20 June 1967 (1967-06-20) figures	1-33
A	US 3 334 161 A (DE GUZMAN JOSE PINEDA) 1 August 1967 (1967-08-01) cited in the application column 2, line 30-32; figures	1-33
A	WO 00 65134 A (SCHMIT LAURENT ;ICBT PERFOJET SA (FR); MAGGIO ROSARIO (IT)) 2 November 2000 (2000-11-02) page 5, line 17-33; figures	1-33
	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

13 February 2003

Date of mailing of the international search report

14/03/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Barathe, R

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 813 864 A (BALK HERMANN) 21 March 1989 (1989-03-21) the whole document ----	1-33
A	US 5 766 646 A (FREY DETLEF ET AL) 16 June 1998 (1998-06-16) the whole document ----	1-33
A	US 4 009 508 A (STERNBERG ERNEST M) 1 March 1977 (1977-03-01) figures ----	1-33
A	DATABASE WPI Section Ch, Week 198527 Derwent Publications Ltd., London, GB; Class F04, AN 1985-163140 XP002231096 & JP 60 094664 A (ASAHI CHEM IND CO LTD), 27 May 1985 (1985-05-27) abstract A & JP 60 094664 A (ASAHI CHEM IND CO LTD) 27 May 1985 (1985-05-27) figures 1-4 -----	1-33

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2815647	A	26-04-2002	FR 2815647 A1	26-04-2002
			AU 9569601 A	06-05-2002
			WO 0234990 A1	02-05-2002
US 3325906	A	20-06-1967	LU 53561 A1	28-06-1967
US 3334161	A	01-08-1967	NONE	
WO 0065134	A	02-11-2000	FR 2792656 A1	27-10-2000
			AU 4301300 A	10-11-2000
			CN 1348513 T	08-05-2002
			EP 1177336 A1	06-02-2002
			WO 0065134 A1	02-11-2000
			JP 2002543299 T	17-12-2002
			TR 200103043 T2	22-04-2002
US 4813864	A	21-03-1989	BR 8706370 A	01-11-1988
			BR 8706371 A	01-11-1988
			CA 1282922 A1	16-04-1991
			CA 1287460 A1	13-08-1991
			DE 3736418 A1	10-11-1988
			DE 3744657 A1	10-11-1988
			DK 172288 A	26-10-1988
			DK 172388 A	26-10-1988
			FI 881298 A	26-10-1988
			FI 881300 A	26-10-1988
			GB 2203764 A ,B	26-10-1988
			GB 2204071 A ,B	02-11-1988
			IT 1217374 B	22-03-1990
			IT 1217375 B	22-03-1990
			JP 1060094 B	21-12-1989
			JP 1574739 C	20-08-1990
			JP 63275766 A	14-11-1988
			JP 1049819 B	26-10-1989
			JP 1563639 C	12-06-1990
			JP 63275767 A	14-11-1988
			KR 9106430 B1	24-08-1991
			KR 9106432 B1	24-08-1991
			NO 881401 A	26-10-1988
			NO 881403 A	26-10-1988
			SE 8801259 A	26-10-1988
			SE 8801261 A	26-10-1988
			US 4851179 A	25-07-1989
US 5766646	A	16-06-1998	DE 19521466 A1	19-12-1996
			IT MI960970 A1	14-11-1997
			JP 3135498 B2	13-02-2001
			JP 9095854 A	08-04-1997
US 4009508	A	01-03-1977	CA 1058691 A1	17-07-1979
			DE 2618743 A1	11-11-1976
			FR 2309655 A1	26-11-1976
			GB 1503282 A	08-03-1978
			JP 1031440 C	29-01-1981
			JP 51147681 A	18-12-1976
			JP 54028509 B	17-09-1979
			LU 74851 A1	08-02-1977
			US 4081856 A	28-03-1978

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 60094664 A	27-05-1985	JP 1790117 C JP 4080136 B	29-09-1993 17-12-1992
<hr/>			